


In series
The model is in series and available for the long term.



Specification

Sensor	
Sensor type	CMOS Color
Shutter	Rolling shutter
Sensor characteristic	Linear
Pixel Class	13 MP
Resolution	12.62 Mpix
Resolution (h x v)	3552 x 3552 Pixel
Aspect ratio	1:1
ADC	12 bit
Color depth (camera)	12 bit
Optical sensor class	1/1.6"
Optical Size	7.104 mm x 7.104 mm
Optical sensor diagonal	10.05 mm 1/1.6"
Pixel size	2 µm
CRA (Chief Ray Angle)	12 °
Manufacturer	Sony
Sensor Model	IMX676-AACR1-C
Gain (master/RGB)	31.6x/16x
AOI horizontal	same frame rate
AOI vertical	increased frame rate
AOI image width / step width	256 / 2
AOI image height / step width	2 / 2
AOI position grid (horizontal/vertical)	2 / 2
Binning horizontal	increased frame rate
Binning vertical	increased frame rate
Binning method	Horizontal: mean / Vertical: mean
Binning factor	2x2
Decimation (subsampling) horizontal	-
Decimation (subsampling) vertical	-
Decimation (subsampling) method	M/C automatic

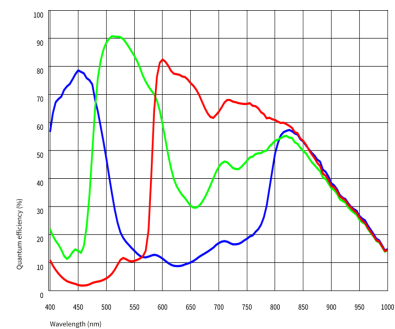

Model

Frame rate freerun mode	9.9 fps
Frame rate trigger (maximum)	-
Exposure time (minimum - maximum)	0.037 ms - 1999 ms
Long exposure (maximum)	120034 ms
Power consumption (Power over Ethernet)	4.3 W
Power consumption (external power supply)	3.9 W
Image memory	128 MB

HDR

Mode	ClearHDR
------	----------

Ambient conditions

The temperature values given below refer to the outer device temperature of the camera housing.


Allowed device temperature during operation	-20 °C - 55 °C / -4 °F - 131 °F
Allowed ambient temperature during storage	-20 °C - 60 °C / -4 °F - 140 °F
Humidity (relative, non-condensing)	0 % - 100 %

Connectors

Interface connector	GigE M12, screwable
I/O connector	8-pin Binder connector (Binder series 712: 09-0427-020-08)
Power supply	12 V - 24 V or PoE

Pin assignment I/O connector

1	Trigger input with optocoupler (+) - Line 0
2	Input power supply (VCC) 12-24 V DC
3	General Purpose I/O (GPIO) 1 - Line 2
4	Ground (GND)
5	Flash output with optocoupler (+) - Line 1
6	Flash output with optocoupler (-) - Line 1
7	Trigger input with optocoupler (-) - Line 0
8	General Purpose I/O (GPIO) 2



Design

Lens Mount	C-Mount
IP code	IP66, IP67, IP69, IPx9K
Dimensions H/W/L	41.0 mm x 53.0 mm x 42.7 mm
Mass	175 g
Housing material	Aluminum

Features

List of on-camera image pre-processing features.

All features of the table are available via our IDS peak software for image pre-processing on the host computer (sensor model dependent).

GV-54L0FA-C-HQ Rev.1.3 (1012658)

Image Acquisition	Freerun	✓
	Software trigger	-
	Hardware trigger	-
	Trigger controlled exposure	-
	Denoiser	✓
	Long exposure	✓
	Line scan	-
	Global start	-
Flashing	Flashing	✓
	PWM flashing	✓
Image Adjustments	Auto exposure	✓
	Auto gain	✓
	Auto whitebalance	✓
	Color correction	✓
	Gamma	✓
	LUT	✓
	Mirror/flip	X/Y
On-board Image Processing	Pixel formats	
	Mono8	
	BayerRG8	
	BayerRG10	
	BayerRG10p	
	BayerRG12	
	BayerRG12p	
	BGR8	
	RGB8	
	BGR10p32	
	RGB10p32	
	Region of interest	✓
	Decimation (FPGA)	✓
	Decimation (Sensor)	
	Binning (FPGA)	✓
	Binning (Sensor)	2x2 Increases frame rate.
Others	IP settings	✓
	Bandwidth management	✓
	Chunks	✓
	Sequencer	-
	PTP	✓
	Firmware update	✓
	1st supported firmware version	3.95.28444